


# 25' x 32' BULLETIN

## DESIGN AND FINISHING SPECIFICATIONS

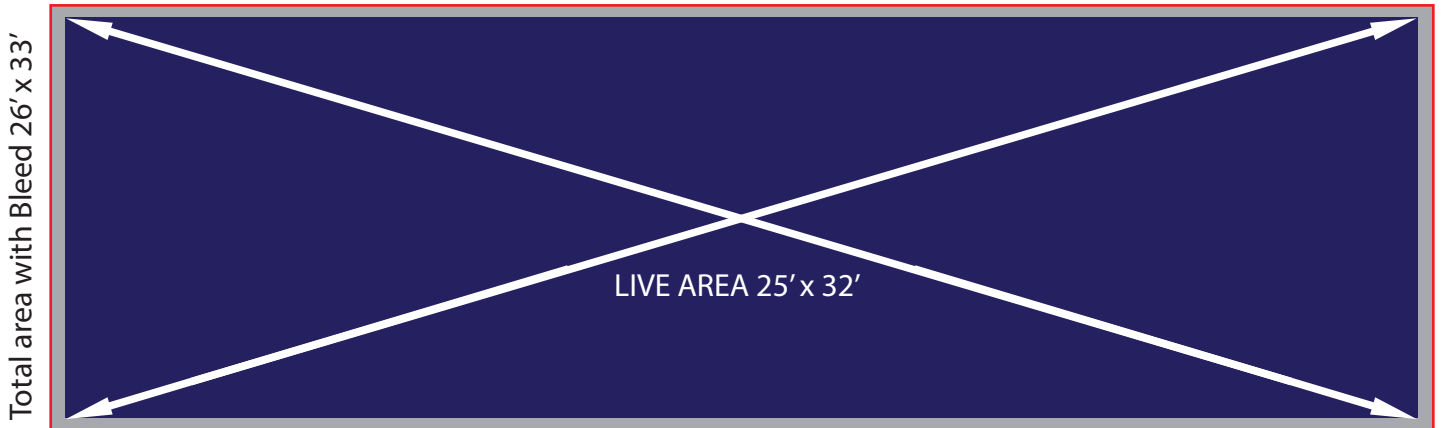

 LIVE AREA 25' x 32'  6 inch bleed is required.  Total area with Bleed 26' x 33'

### ART SPECIFICATIONS

This are the general file preparation specs. If you are building something that is very large in size or in different software other than Photoshop or Illustrator, please contact us for additional file preparation information.

To insure the highest quality, the following digital file guidelines are recommended for billboard production:

#### Adobe Photoshop: Image size :

1"=1' (one inch = one foot) Scale @ 300 dpi  
Please add 1" in canvas size for bleed.

*Example: a 14'x48': File needs to be 14"x48" @ 300 dpi.  
With bleed: 15"x49" .*

**Adobe Illustrator:** 300 dpi (min) CMYK, .ai, .eps, or high res .pdf, **convert all type to outline.**  
1"=1' (one inch = one foot) Scale. **Embedded photos at 300 dpi.**

#### ACCEPTABLE FORMATS

Adobe PDF (fonts embedded)

LINKS: .EPS (cmyk).TIF (cmyk)

FONTS: Must convert to outline

#### COLOR MATCHING

If precise color matching is critical, please provide a quality matchprint and/or Pantone callout for solid colored areas.

### FINISHING SPECIFICATIONS

Live image area 25' x 32'

6" bleed with 3" pockets required

Total area 26' x 33'

### MATERIAL / VINYL/ INK

Material/Vinyl Black Back

Weight: 11 ounces

Minimum Warranty: 12 months against ink fade, ink peeling, and failure of material or pockets.

Inks: Inks must be weatherproof/waterproof with sufficient UV protection, and in compliance with product bulletin.

**THE REISSGROUP**

214-551-0321  
[Lisa@TheReissGroup.net](mailto:Lisa@TheReissGroup.net)